

ENLiFEN 24V12Ah

24 EL 12

- Valen ENLiFEN range features a Lithium Phosphate (LiFe PO₄) battery constructed utilising individual 3.2V3200mAh cells in series and parallel.
- Superior life with an expectancy of 6 to 10 times more than standard AGM batteries.
- Up to two thirds lighter in weight than standard AGM batteries.
- Safer battery option as the customised built-in Valen ENLiFEN BMS prevents short circuit, over-voltage and over-discharge, as well as thermal runaway.
- Customisation allows the Valen ENLiFEN to be fitted into areas standard VRLA batteries cannot be utilised due to size restrictions.
- Maintenance-free battery range dramatically reduces the time spent on site for battery-related issues






24 EL 12

BATTERY SPECIFICATIONS

Dimensions

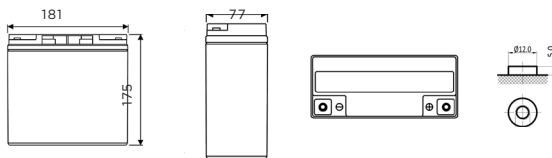


Specifications

Nominals Voltage	24 Volt nominal
Capacity	12Ah
BMS	Internal
Chemistry	Lithium Iron Phosphate (LiFePO4)
Dimensions	181(L) x 77(W) x 175(H)
Weight	2.7kg
Terminal	Insert M5
Container/Cover	ABS
Internal Resistance	≤45mΩ
Cycle Life	
Passive Protection Function	
Charge Voltage	29.2V
Charge Mode	CV CC
Charge Current	15A
Max. Charge Current	15A
Continuous Discharge Current	15A
Max. Pulse Current	35A for 60seconds
Discharge Cut-off Voltage	20V
Charge Temperature	0°C to +45°C
Discharge Temperature	-20°C to +60°C
Storage Temperature	-20°C to +40°C

Specifications subject to change without notice.

ENLiFEN 24V12Ah

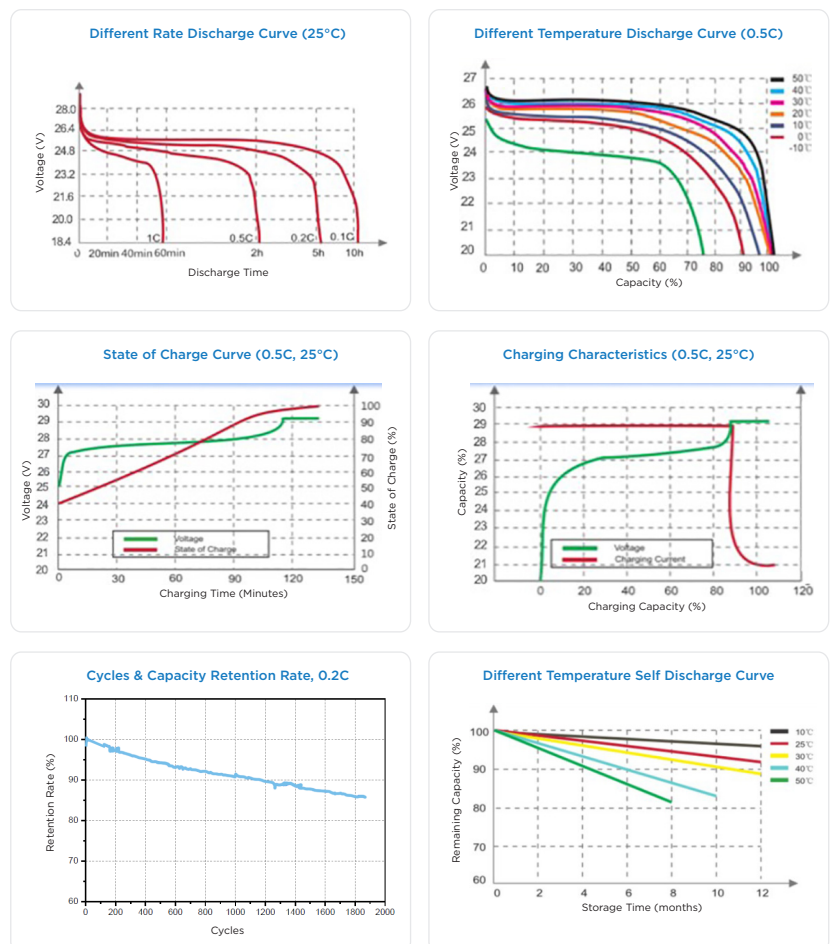

Disclaimer:

While Valen have taken every effort to represent the ENLiFEN PO4 accurately within this specification, Valen advise the user to ascertain their own measurements and test the parameters and specifications to which the battery must conform. The Lithium battery technology is rapidly being developed and research is continually carried out to ensure that the ENLiFEN PO4 battery will meet the needs of a growing market.