

TOPIN 12V70Ah

12TP70

- SSL approved
- Case and cover made of high quality ABS
- Freedom from electrolyte maintenance
- Not restricted for air or surface transport
- Each cell is individually valved
- Multi cell design for economy of installation and maintenance
- Lead Calcium Alloy grids for minimal gassing and ease of recycling
- Absorbent Glass Matt (AGM) technology for efficient gas recombination of up to 99%




12TP70

BATTERY SPECIFICATIONS




Dimensions

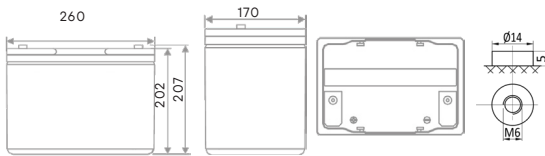

Specifications

Nominals Voltage	12V
Number of Cells	6
Design life	10 years
Normal Capacity 25°	
20 Hr rate (10.5V)	79Ah
10 Hr rate (10.5V)	76Ah
5 Hr rate (10.5V)	65.5Ah
CCA at -18°C	550
Dimensions	260(L) x 170(W) x 202(H)mm
Weight	24.2kg
Terminal	M6
Torque Setting	7Nm
Charge voltage	Cycle: 14.4 - 14.6V at 25°C Float: 13.5 - 13.8V at 25°C
Internal resistance	5mΩ 25°C - Fully charged Battery
Electrolyte	Sulphuric acid
Operating Temperature	-20°C to +60°C

TOPIN 12V70Ah

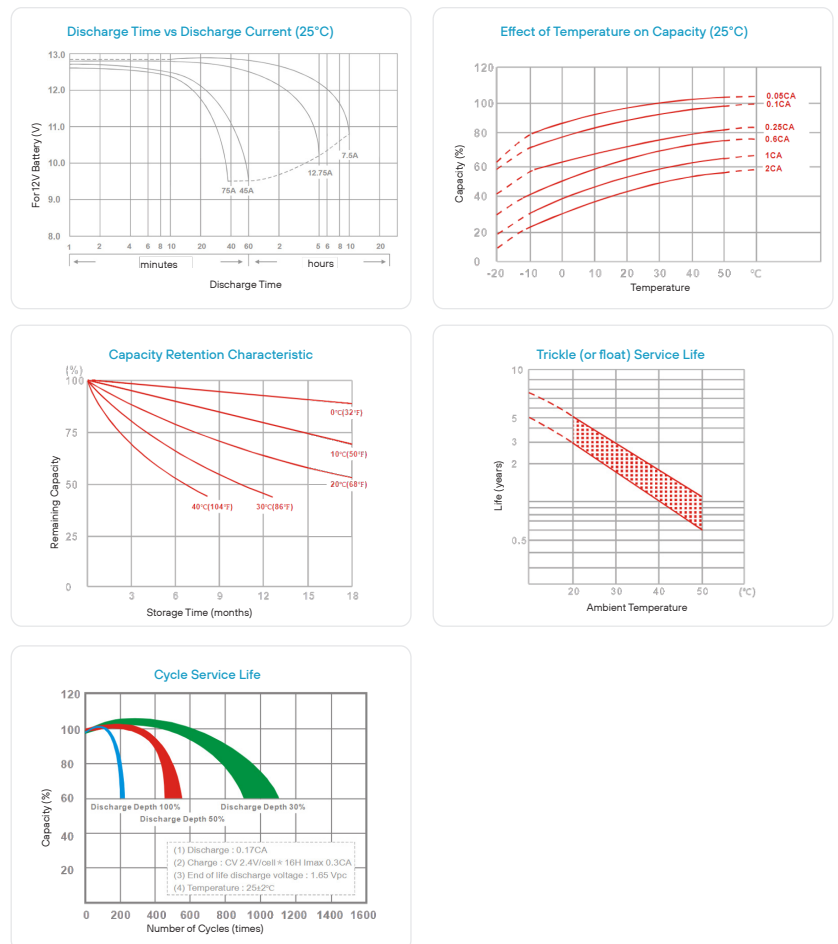

(However it is recommended that the batteries be operated in the temperature range of 20 to 30°C to obtain full life and optimum performance.)

Specifications subject to change without notice.

PERFORMANCE DATA

12TP70

Discharge Constant Power (Watts at 25°C)

End Voltage Time		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
5	min	407	429	491	521	537	552	567
10	min	278	294	336	357	368	378	388
15	min	178	225	240	274	280	287	294
30	min	139	149	155	159	160	162	165
60	min	80.8	85.3	87.8	89.8	90.5	91.3	92.3
120	min	47.2	49.8	51.3	52.7	53.2	53.7	54.3
180	min	34.0	35.8	36.8	37.7	38.0	38.3	38.8
240	min	27.8	28.8	29.7	30.3	30.5	30.8	31.2
300	min	24.8	25.3	25.7	26.0	26.2	26.3	26.5
600	min	15.0	15.2	15.3	15.5	15.5	15.6	15.6
1200	min	7.85	7.97	8.07	8.15	8.20	8.23	8.28

Discharge Constant Current (Amperes at 25°C)

End Voltage Time		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
5	min	178	214	245	272	281	292	304
10	min	112	143	167	186	192	199	207
15	min	90.5	109	124	138	141	145	150
30	min	63.2	72.6	79.4	84.5	85.6	87.2	89.0
60	min	38.6	41.5	43.3	44.8	45.3	45.9	46.7
120	min	20.2	22.4	23.9	25.0	25.4	25.8	26.3
180	min	15.8	17.4	18.4	19.3	19.6	20.0	20.4
240	min	12.9	13.9	14.7	15.3	15.6	15.9	16.2
300	min	11.8	12.6	13.1	13.4	13.6	13.8	14.1
600	min	7.53	7.62	7.69	7.74	7.76	7.81	7.85
1200	min	3.87	3.93	3.98	4.02	4.03	4.05	4.08