

ENDUROGEL 6V260Ah

6EG260

- Valen ENDUROGEL range features a rechargeable, deep cycle, Valve Regulated Lead Acid (VRLA) battery.
- The Valen ENDUROGEL battery range outshines the standard Gel battery by incorporating both advanced lead plates and the Catalyst.
- High purity virgin lead plates with 1.6% tin extend the longevity of the Valen ENDUROGEL battery.
- Maintenance-Free Design
- Thixotropic Gelled electrolyte, genuine Gel separators, quality lead plate, and a Catalyst Life Extender allow the Valen ENDUROGEL range to offer a 12-year design life and is ideal for use in mission-critical cyclic applications.
- FAA and IATA Approved and is safe for air transportation




6EG260

BATTERY SPECIFICATIONS



Dimensions

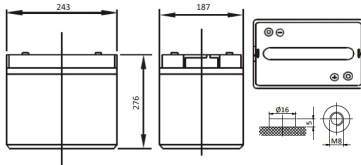

Specifications

| | |
|------------------------------|--|
| Nominals Voltage | 6V |
| Number of Cells | 3 |
| Design life | 12 years |
| Normal Capacity 25° | |
| 100 Hr rate (10.5V) | 260Ah |
| 20 Hr rate (10.5V) | 220Ah |
| 10 Hr rate (10.5V) | 204Ah |
| 5 Hr rate (10.5V) | 180Ah |
| Dimensions | 243(L) x 187(W) x 276(H)mm |
| Weight | 35kg |
| Terminal | Insert - M8 |
| Torque Setting | 10.5 Nm |
| Charge voltage | Cycle: 7.05-7.2V at 25°C Float: 6.75-6.9V at 25°C |
| Internal resistance | 2.5mΩ 25°C - Fully charged Battery |
| Electrolyte | Thixotropic Gel - Sulphuric acid |
| Operating Temperature | -20°C to +60°C |

Discharge Constant Current (Amperes at 25°C)



| End Point Volts / Cell | 15 min | 30 min | 1 hour | 3 hour | 5 hour | 10 hour | 20 hour |
|------------------------|--------|--------|--------|--------|--------|---------|---------|
| 5.25V | 297 | 197 | 111 | 64.5 | 35.9 | 20.4 | 11.5 |

Discharge Constant Power (Watts at 25°C)


| End Point Volts / Cell | 15 min | 30 min | 1 hour | 3 hour | 5 hour | 10 hour | 20 hour |
|------------------------|--------|--------|--------|--------|--------|---------|---------|
| 5.25V | 1614 | 1074 | 613 | 361 | 212 | 115 | 61.7 |

(However it is recommended that the batteries be operated in the temperature range of 20 to 30°C to obtain full life and optimum performance.)


ENDUROGEL 6V260Ah

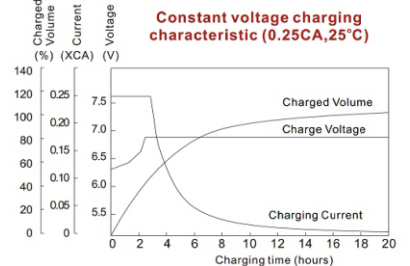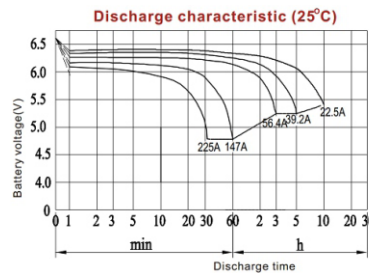


Relationship between charging voltage and temperature

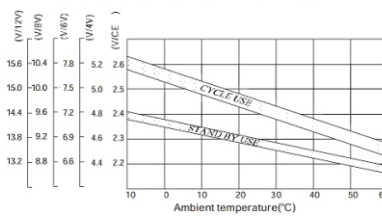


Self-discharge characteristic

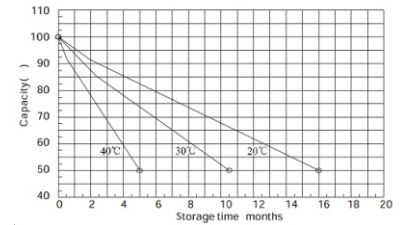


Life characteristics of Standby use

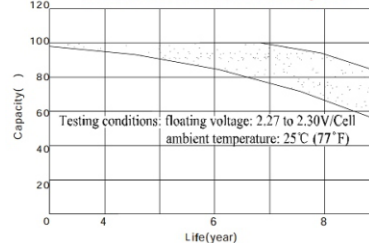


Endurance in cycles according to IEC 896-2

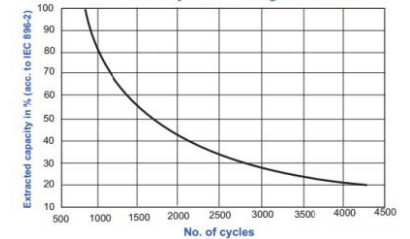

Temperature effects on float life

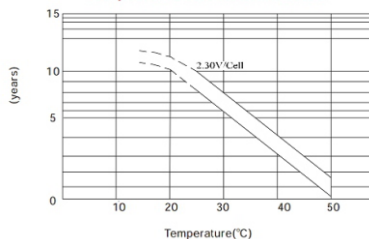

Temperature effects on capacity

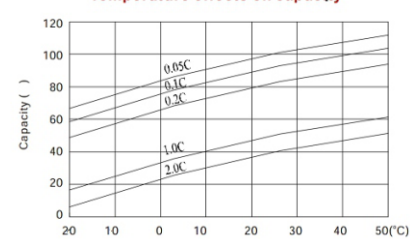

Specifications subject to change without notice.

*Although the Catalyst extends battery life at high temperatures it is not expected to change the momentary delivery of the current. The benefit of having the Catalyst in batteries will be shown over time.



QUALITY CERTIFIED
ISO 9001:2015



ENVIRONMENT CERTIFIED
ISO 14001:2015



SAFETY CERTIFIED
ISO 45001:2018

AUSTRALIA
1300 734 253
sales@valen.com.au
www.valen.com.au

NEW ZEALAND
0800 734 253
sales@valen.co.nz
www.valen.co.nz